





01.10.513 / 01.10.510 / 01.10.500
Model 'Profit' 216 / 206 / 190
for cows

Stall width
115-120
center to center

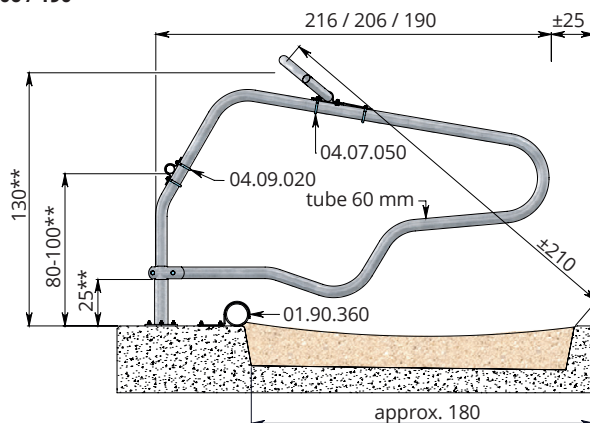

01.13....
Model 'Comfort-NG'
for cows
mounted to
60 mm support post

Stall width
115-120
center to center

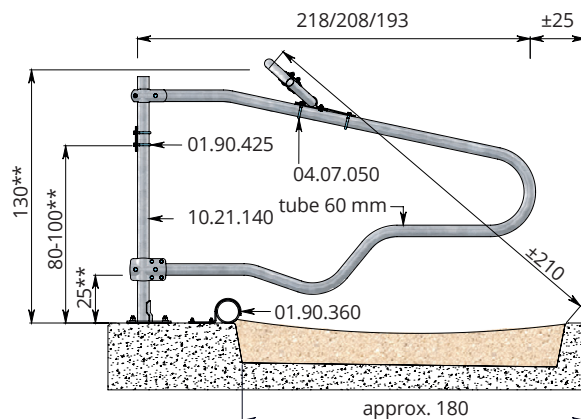

Special model for deep bedding freestalls

Cow comfort is a hot topic in modern dairy farming. As well as units with cow mattresses and waterbeds, many stalls are fitted with deep-bedded floors. The type of stuffing depends on the availability of materials or the dairy farmer's preference. For optimal deep bedding, a 15-20 cm matting is recommended. The realisation of this thickness requires a rounded 20-25 cm high rear edge in relation to the dung floor. Boundaries of similar height are required for the cubicle; the knee bar is mounted above the edge.

Waved neck bar

With the waved neck bar the shoulder height or diagonal boxside - neck rail can be raised up till 30 cm.

'Profit' for deep litter freestalls

Freestall divider model 'Profit' for cows and heifers (mounting support piece and T-clamp included)

- 01.10.513 Freestall divider model 'Profit' 216 for cows
- 01.10.510 Freestall divider model 'Profit' 206 for cows
- 01.10.500 Freestall divider model 'Profit' 190 for cows
- 01.10.520 Freestall divider model 'Profit' 175 for heifers

Fittings

- 04.07.050 Shoulder rail strap clamp 48 x 60 mm
- 04.09.020 Strap clamp 48 x 60 mm
- 11.11.240 Floor anchor M12 x 106 (3 per divider)
- 11.12.012 Chemical anchor M12 (10 anchors), an alternative to floor anchor
- 10.15.600 Tube 48 mm, length 6 m
- 04.21.015 Tube clamp coupling 48 mm
- 04.24.015 End coupling 48 mm
- 11.11.210 Floor anchor M10 x 71 (2 per end coupling)
- 04.24.215 Extended end coupling
- 01.90.360 Mounting clip for knee rail PE125
- 11.11.210 Floor anchor M10 x 71 (2 per mounting clip)

'Comfort' for deep litter freestalls

Freestall divider for cows, model 'Comfort-NG', mounted to support post 60 mm (T-clamps or four-way clamps are included)

- 01.13.560 Model 'Comfort-NG' 218 - stall floor \geq 250 cm
- 01.13.550 Model 'Comfort-NG' 208 - stall floor 240 cm
- 01.13.530 Model 'Comfort-NG' 193 - stall floor 220 cm
- 01.13.575 Model 'Comfort-NG' 228/228 - stall floor 500 cm
- 01.13.565 Model 'Comfort-NG' 218/218 - stall floor 480 cm
- 01.13.555 Model 'Comfort-NG' 208/208 - stall floor 460 cm
- 01.13.545 Model 'Comfort-NG' 193/208 - stall floor 445 cm
- 01.13.535 Model 'Comfort-NG' 193/193 - stall floor 430 cm

Fittings

- 04.07.050 Shoulder rail strap clamp 48 x 60 mm
- 10.21.140 Floor-mounted support post 60 mm x 140 cm (item no. for single row)
- 01.12.140 Floor-mounted support post 60 mm x 140 cm (item no. for double row)
- 10.20.160 Support post 60 mm x 160 cm
- 11.02.200 Plastic protective sleeve 60 mm
- 11.06.200 Stopper 60 mm
- 11.11.250 Floor anchor M16 x 120 mm (use 4 when installing a single row) (use 2 when installing a double row)
- 11.12.016 Chemical anchor M16 (10 anchors)
- 01.90.360 Mounting clip for knee rail PE125
- 11.11.210 Floor anchor M10 x 71 (2 per mounting clip)
- 01.90.425 Belt clamp for 60 mm tubing (bolts and nuts are included)
- 01.90.400 Retainer belt 50 mm, 100 m roll
- 01.90.405 Retainer belt 50 mm, 50 m roll

** - measured from the top of the litter bed